


TENAX TR

HDPE extruded net with rhomboidal mesh for lawn reinforcement.

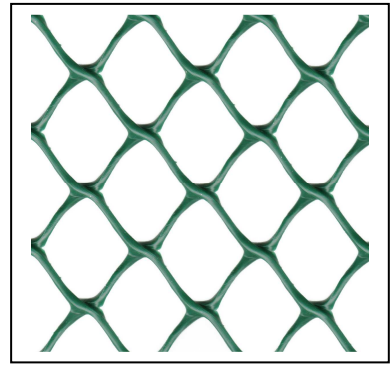

Picture out of scale

PHYSICAL CHARACTERISTICS	TEST METHOD	UNIT	TR	NOTES
POLYMER TYPE			POLYETHYLENE	-
MESH TYPE			RHOMBOIDAL	-
COLOUR			GREEN	-

DIMENSIONAL CHARACTERISTICS	TEST METHOD	UNIT	TR	NOTES
MD PITCH		mm	35.0	b
TD PITCH		mm	33.0	b
THICKNESS		mm	5.0	-
UNIT WEIGHT		g/m ²	640	a
ROLL WIDTH		m	2.0	-
ROLL LENGTH		m	30.0	-
ROLL DIAMETER		m	0.42	-
ROLL VOLUME		m ³	0.36	-
ROLL WEIGHT		kg	38.4	a
INNER PACKAGING				-
OUTER PACKAGING				-

TECHNICAL CHARACTERISTICS	TEST METHOD	UNIT	TR	NOTES
MD TENSILE STRENGTH		kN/m	4.5	b
MD ELONGATION		%	60.0	b
TD TENSILE STRENGTH		kN/m	4.5	b
TD ELONGATION		%	40.0	b

NOTE:

- a) Tolerance $\pm 5\%$
- b) MD: machine direction
TD: transversal direction

The data contained in this publication are based on the knowledge available at the time of printing and may be subjected to amendments due to changes of the methods of testing and/or manufacturing. All dimensions are reported as typical values.

GEN 0176,6 - E - 09/17



www.tenax.net

TENAX SpA
Via dell'Industria, 3
23897 Viganò (LC)
Tel. +39 039.9219300
Fax +39 039.9219290
customer.service@tenax.net



SGS ITALY Certificate n° IT93/0008.01
SGS U.K. Certificate n° IT93/2568.01

